



# The Height of Confidence

A fall protection kit designed to help you meet the new OSHA residential roofing directive.

## 3M™ Fall Protection Roofing Kit 20058

Providing a fall protection kit for convenient compliance for most roofing applications. Complies with OSHA 29 CFR 1910.66, 1926.502 regulations and meets the requirements of ANSI Z359.1-2007 standards.

### Bucket includes:



**UPC 10-078371-00086-5**  
**Case Qty/Units 1/EA**

### Storage Bucket 5000

5 gallon bucket with lid for convenient storage and reuse.



### Reusable Roof Anchor 4000

Steel anchor rated up to 5,000 lbs. Use on metal or wood. Fits most pitch angles. Easy to install and can be reused under most conditions.




### 50 ft. Rope Lifeline Assembly with Manual Rope Adjuster 0221-50RG

50 ft. Rope Lifeline Assembly with attached Manual Rope Adjuster. Rated for workers with a total weight capacity of up to 310 lbs. Lifeline assembly helps to provide user with a wide range of mobility for most roofing applications.

### SafeLight Universal Harness 10910

5 points of adjustment for better fit and comfort. Universally sized (S-XL).

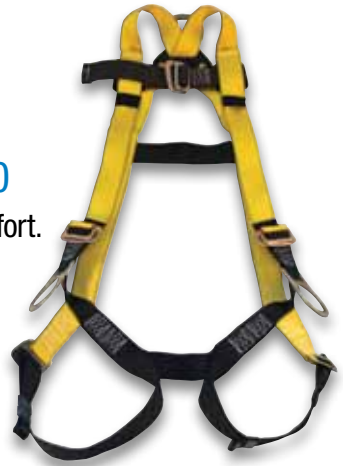

### SafeLight 6 ft. Energy Absorbing Lanyard 209512

6 ft. Energy Absorbing Lanyard for users with a total weight capacity of up to 310 lbs. Built in energy absorber limits the forces of a fall arrest to 900 lbs.

*See back of flyer for illustration of the 3M™ Fall Protection Roofing Kit 20058 in use. Individual components can be purchased separately.*



# The ABC's of Fall Protection for Residential Roofing with the 3M™ Fall Protection Roofing Kit 20058

Three components of a Personal Fall Arrest System must be in place and properly used to provide fall protection in the event of a fall.



**A Anchorage**  
The Reusable Roof Anchor 4000 must be properly installed at the roof peak to provide a safe and secure anchor point.

**B Body Protection**  
SafeLight Universal Harness 10910 provides connection point on worker for the personal fall arrest system.

**C Connecting Devices**  
SafeLight 6 ft. Energy Absorbing Lanyard 209512 connects harness to either the manual rope grab or roof anchor.

As pictured, attaching the SafeLight 6 ft. Energy Absorbing Lanyard 209512 to the Manual Rope Adjuster on the Rope Lifeline Assembly helps to increase mobility by allowing the worker to locate the rope adjuster along the lifeline until the desired work position is reached.

## **⚠WARNING**

**Warning:** Compliant fall protection and emergency rescue systems help prevent serious injury during fall arrest. Users must read and understand the *User Instructions* provided with the product and be properly trained by their employer prior to use per OSHA 1910.66 and 1926.503 or applicable local standards. **Misuse or failure to follow warnings and instructions may result in serious personal injury or death.** For proper use, see supervisor, *User Instructions*, or call 3M OH&ESD Technical Service at 1-800-243-4630. In Canada, call 1-800-267-4414.

**Warranty, Limited Remedy, and Disclaimer:** Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



**Occupational Health and  
Environmental Safety Division**  
3M Center  
Building 235-2NW-70  
St. Paul, MN 55144-1000

**For more information:**  
Sales Assistance: 1-800-3M-HELPS in U.S. and Canada  
Technical Assistance: 1-800-243-4630 in U.S.  
1-800-267-4414 in Canada  
[www.3M.com/FallProtection](http://www.3M.com/FallProtection)

© 3M 2011. All rights reserved.  
3M is a trademark of 3M Company,  
used under license in Canada.  
70-0715-7492-8